




# Quam

## SYSTEM 6VP Vandal Resistant, Paging Horn Speaker System

### 0601 - VANDAL RESISTANT SPEAKER ASSEMBLIES

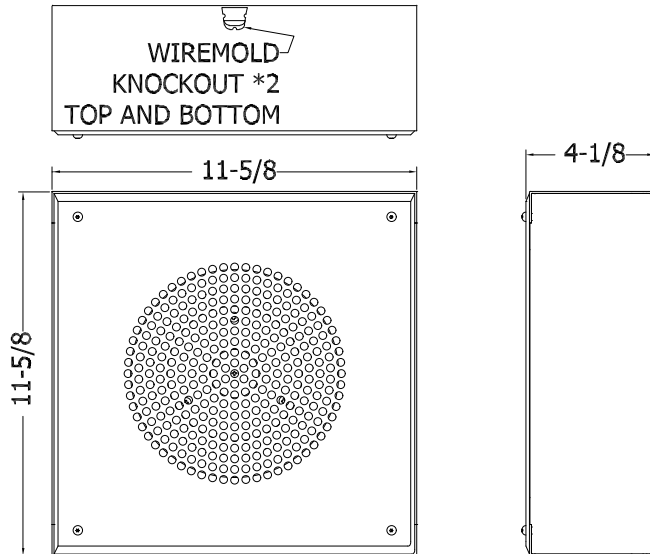

#### GENERAL DESCRIPTION

The QUAM SYSTEM 6VP is a complete loudspeaker assembly with double re-entrant horn, compression type loudspeaker, 16W- 25/70.7V pigtail transformer, 16 gage square steel baffle and enclosure. Mounting hardware is #8-32 'pin-in-torx'.

Finish: White baked epoxy hybrid.

#### INTENDED USE

Indoor or protected outdoor environment, vertical or horizontal surface mount.

Program Material: Voice and signal tone

#### SYSTEM COMPONENTS

Loudspeaker	H16
Transformer	Integral to unit, 16W, 25 and 70.7V, pigtail select, 5 taps at -3 dB levels*
Enclosure	SE1WVP
Baffle	BS8VP

\*16W, 8W, 4W, 2W, 1W

#### RECOMMENDED ADDITIONAL QUAM COMPONENTS

0602- Vandal Resistant Intercom Assemblies  
0603- Vandal Resistant Components

#### AUDIO SPECIFICATIONS:

Average Sensitivity	110 dB-SPL, 1W / 1M
Power Rating	16W-RMS, EIA 426A Standard
Calculated Maximum System Output	121dB-SPL, 16W/ 1M
Frequency Response	350Hz -10 kHz
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half Space
Audio Connection	7" long, color-coded tinned wires, pre-cut

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: [www.quamspeakers.com](http://www.quamspeakers.com)

CORRECTION / DETENTION

06

#### Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637  
Phone: (800) NEED NOW Fax: (888) NEED NOW  
(800) 633 - 3669 (888) 633 - 3669  
E-Mail: [neednow@qnc.com](mailto:neednow@qnc.com) [www.quamspeakers.com](http://www.quamspeakers.com)

© 2012 Quam-Nichols Company Quam-Nichols reserves the right to make changes and/or improvements to its products at any time and without notice.



TSYS6VP\_12JA06