


SD-7201GAPT1Q Green Mushroom Button with Stainless Plate and Built-in Timer Manual



Features:

- Green, 1 1/2" diameter, mushroom-cap push button
- "EXIT" and "SALIDA" silk-screened on plate
- Stainless-steel single-gang plate
- With built-in timer module, field adjustable 1~180 seconds
- SPDT, NO/NC contact rated 3A@24VDC
- Equipped with buzzer output for audio status indicator
- Weather resistant when properly installed

Timer Outputs:

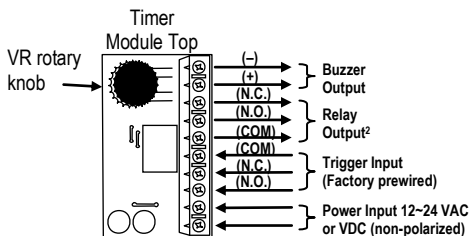

NOTE: Terminal legend can be found on back of PCB.

² Relay rated 3A@24VDC

Wiring for SD-7201GAPT1Q:

1. Connect 12~24 VAC/VDC (non-polarized) to the power input terminal block of the timer module.
2. Connect N.O. or N.C. device to the relay output terminal block as desired.
3. Connect the positive and negative wires of the buzzer to the buzzer output terminal block if desired.
4. Set the timer module between 1~180 seconds via the VR rotary knob as shown. Turn clockwise to increase and counterclockwise to decrease. Test to ensure the timer is set correctly.

NOTE: For weatherproof installation, use a waterproof backbox and apply a bead of silicone sealant (not included) around the rim of the backbox and faceplate edge. Apply a small amount of sealant below each screw head and screw the plate into the back-box, taking care not to crimp the wires and ensuring a good seal.

IMPORTANT WARNING: For a weatherproof installation, ensure the unit is installed in a waterproof backbox, and that the faceplate and faceplate screws are properly sealed. Incorrect mounting may lead to exposure to rain or moisture in the enclosure which could cause a dangerous electric shock, damage the device, and void the warranty. Users and installers of this product are responsible for ensuring this product is properly installed and sealed.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints.

Copyright © 2016 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.


SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com

Email: sales@seco-larm.com

 PITSW1

Order Part# 763-155-2%

MI_SD-7201GAPT1Q_161103.docx