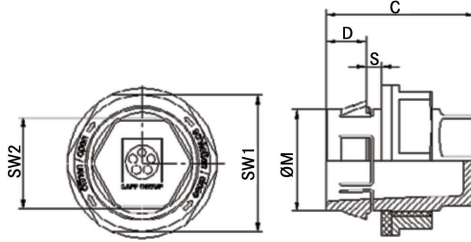


SKINTOP® CLICK BLK

Polyamide plugs for use in metric-sized mounting holes

**Technical data**

	Material:	
	- body:	special polyamide
	- seal:	special elastomer
	Temperature range:	-20°C to +100°C
	Color:	light gray (RAL 7035)
	IP Protection:	IP68, 5 bar

Part number	Size	Wall thickness (S) IN	Wrenching flats (SW1) in	(SW2) in	Overall length (C) in	Thread length (D) in	Pack size
52109013	M16	0.04 - 0.16	0.55	0.87	1.12	0.31	50
52109014	M20	0.04 - 0.16	0.71	1.06	1.16	0.31	25
52109015	M25	0.04 - 0.16	0.87	0.55	1.20	0.31	25

Approvals**SKINDICHT® MR/MR-M**

Nickel-plated brass reducers for PG & metric SKINTOP® cable glands



SKINDICHT® MR/MR-M reducers allow the use of cable glands with smaller connection threads than the existing thread hole.

Technical data

	Material:	nickel-plated brass
	Temperature range:	-60°C to +200°C

Approvals**PG**

Part number	Size male → female	Pack size
52003750	PG 9 → PG 7	100
52003760	PG 11 → PG 7	100
52003770	PG 11 → PG 9	100
52003780	PG 13 → PG 7	100
52003790	PG 13 → PG 9	100
52003800	PG 13 → PG 11	100
52003810	PG 16 → PG 7	100
52003820	PG 16 → PG 9	100
52003830	PG 16 → PG 11	100
52003840	PG 16 → PG 13	100
52003850	PG 21 → PG 11	50
52003860	PG 21 → PG 13	50
52003870	PG 21 → PG 16	50
52003880	PG 29 → PG 13	50
52003890	PG 29 → PG 16	50
52003900	PG 29 → PG 21	50
52003910	PG 36 → PG 16	25
52003920	PG 36 → PG 21	25
52003930	PG 36 → PG 29	25
52003940	PG 42 → PG 29	10
52003950	PG 42 → PG 36	10
52003970	PG 48 → PG 36	10
52003980	PG 42 → PG 42	10

metric

Part number	Size male → female	Pack size
52104310	M16 → M12	100
52104311	M20 → M12	100
52104312	M20 → M16	100
52104313	M25 → M16	50
52104314	M25 → M20	50
52104315	M32 → M20	50
52104316	M32 → M25	50
52104317	M40 → M25	50
52104318	M40 → M32	25
52104319	M50 → M32	25
52104320	M50 → M40	10
52104321	M63 → M40	10
52104322	M63 → M50	10