




Quam

8C10FEPAX Dual Cone Loudspeaker

0203 - LOUDSPEAKER, INDIVIDUAL

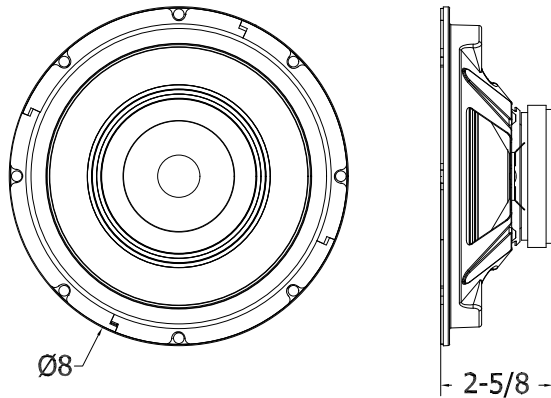

02

LOUDSPEAKERS, INDIVIDUAL

GENERAL DESCRIPTION

The Quam 8C10FEPAX is a 8" O.D. 8-Ohm loudspeaker with urethane foam surround and concentric mount hard fiber HF cone.

Finish: Black baked epoxy hybrid.

INTENDED USE

Wide frequency response replacement loudspeaker or combined with recommended Quam components to form a complete loudspeaker system; indoor environment.

Program Material: Signal tones, voice and music

SYSTEM COMPONENTS

N/A

RECOMMENDED ADDITIONAL QUAM COMPONENTS

Refer to Section 0104.6 - Customer Specified Assembly or individual components listed below:

0502 - Transformers

0301 - Baffles, Round

OR

0302 - Baffles, Square

0401.1 - Flush Mounted Back Boxes, Round

OR

0401.2 - Flush Mounted Back Boxes, Square

0402 - Loudspeaker Mounting Devices

AUDIO SPECIFICATIONS

Average Sensitivity	95dB SPL, 1W / 1M
Power Rating	20W RMS, EIA 426A Standard
Calculated Output	108dB SPL, 20W / 1M
Magnet Type, Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	40 Hz - 18 kHz per EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half Space
Mounting	4x 3/8" Holes Spaced 90° Apart on 7-5/8" Circle
Audio Connection	0.205" Spade Lug

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the web at:
www.QuamSpeakers.com

Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637

Phone: (800) NEED NOW Fax: (888) NEED NOW

(800) 633 - 3669 (888) 633 - 3669

E-Mail: neednow@qnc.com www.quamspeakers.com

© 2012 Quam-Nichols Company Quam-Nichols reserves the right to make changes and/or improvements to its products at any time and without notice.



T8C10FEPAX_12JA06