




760135525 | O-012-DN-8W-F12NS/30T  
Single Jacket All-Dielectric Arid Core Drop Cable

## Representative Image

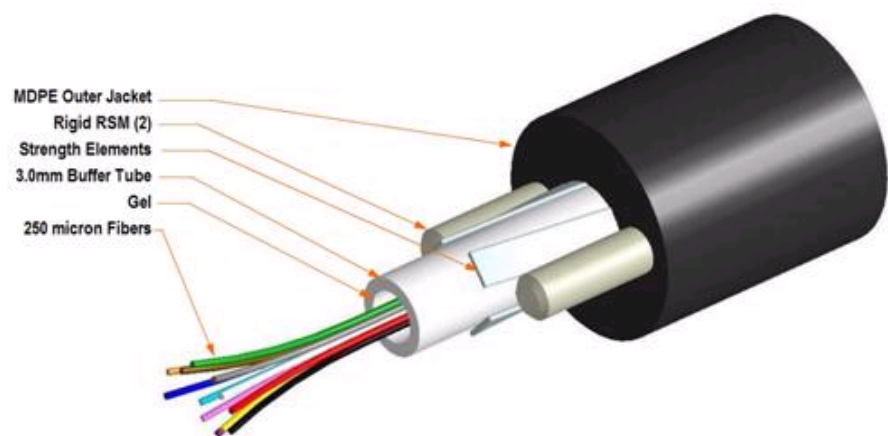

## General Specifications

Cable Type	Central loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled

## Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber
Total Fiber Quantity	12
Fiber Type	TeraSPEED®, zero water peak singlemode fiber
Fiber Type, quantity	12
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

## Dimensions

Buffer Tube/Subunit Diameter	3.00 mm   0.12 in
Cable Weight	46.0 lb/kft   69.0 kg/km
Diameter Over Jacket	8.70 mm   0.34 in
Subunit, quantity	1

## Physical Specifications

760135525 | O-012-DN-8WF12NS/30T

Minimum Bend Radius, loaded	13.0 cm   5.1 in
Minimum Bend Radius, unloaded	8.7 cm   3.4 in
Tensile Load, long term, maximum	400 N   90 lbf
Tensile Load, short term, maximum	1334 N   300 lbf
Vertical Rise, maximum	594.0 m   1948.8 ft

## Environmental Specifications

Environmental Space	Aerial, lashed   Buried
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	35 cycles
Flex Test Method	FOTP-24   IEC 60794-1-2, Section 10
Impact	2.17 ft lb   2.94 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1-2, Section 24

## Environmental Test Specifications

Cable Freeze	-2 °C   28 °F
Cable Freeze Test Method	FOTP-98
Drip	70 °C   158 °F
Drip Test Method	FOTP-81   IEC 60794-1-2, Section 17
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-110-717-2003
-------------------------------	--------------------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

CS-8W-LT (Product Component—not orderable) — TeraSPEED® OS2 Singlemode Fiber