


760138768 | P-036-DS-8W-FMUGR
Plenum Distribution Cable, 36 fiber multi-unit with 12 fiber subunits

Representative Image

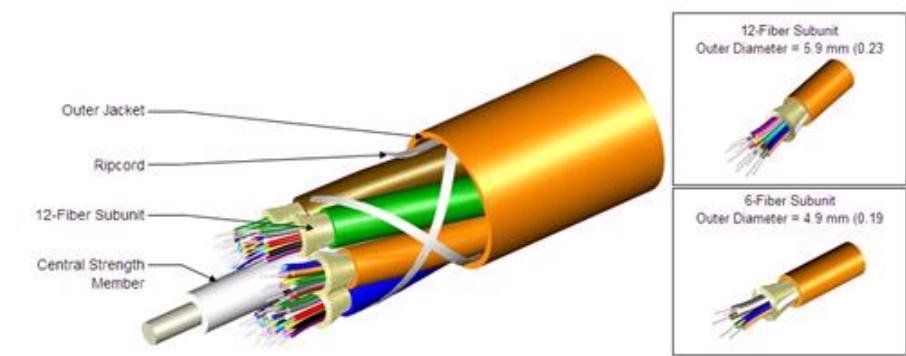

General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber
Total Fiber Quantity	36
Fiber Type	TeraSPEED®, zero water peak singlemode fiber
Fiber Type, quantity	36
Fibers Per Subunit, quantity	12
Jacket Color	Green

Dimensions

Buffer Tube/Subunit Diameter	5.90 mm 0.23 in
Cable Weight	128.0 lb/kft 191.0 kg/km
Diameter Over Jacket	13.70 mm 0.54 in
Subunit, quantity	3

Physical Specifications

Minimum Bend Radius, loaded	20.6 cm 8.1 in
Minimum Bend Radius, unloaded	13.7 cm 5.4 in
Tensile Load, long term, maximum	1068 N 240 lbf

760138768 | P-036-DS-8W-FMUGR

Tensile Load, short term, maximum 3560 N | 800 lbf
Vertical Rise, maximum 500.0 m | 1640.4 ft

Flame Test Specifications

Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 262

Environmental Specifications

Environmental Space	Plenum
Installation Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Mechanical Test Specifications

Compression	10 N/mm 57 lb/in
Compression Test Method	FOTP-41 IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1-2, Section 10
Impact	4.34 ft lb 5.88 N-m
Impact Test Method	FOTP-25 IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1-2, Section 11

Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596-2001 Telcordia GR-409-CORE Issue 2
-------------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



760138768 | P-036-DS-8W-FMUGR

Included Products

CS-8W-TB (Product Component—not orderable) — TeraSPEED® Singlemode Fiber