




760155077 | Z-072-LA-5L-F12BK/25D

Indoor/Outdoor Low Smoke Zero Halogen Single Jacket Single Armor Stranded Loose Tube Arid Core® Cable

Representative Image

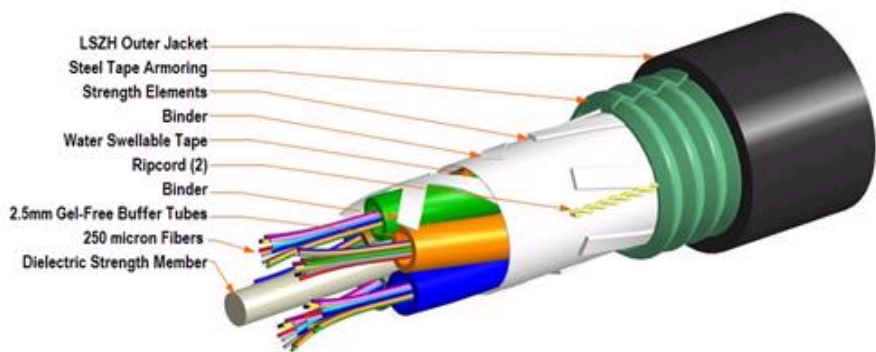

General Specifications

Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	LazrSPEED® 300, 50 µm multimode fiber
Total Fiber Quantity	72
A armor Type	Corrugated steel
Fiber Type	LazrSPEED® 300, 50 µm multimode fiber
Fiber Type, quantity	72
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	2.50 mm 0.10 in
Cable Weight	129.0 lb/kft 191.0 kg/km
Diameter Over Jacket	13.40 mm 0.53 in
Filler, quantity	0
Subunit, quantity	6

Physical Specifications

Minimum Bend Radius, loaded	20.1 cm 7.9 in
-----------------------------	------------------

760155077 | Z-072-LA-5LF12BK/25D

Minimum Bend Radius, unloaded	13.4 cm 5.3 in
Tensile Load, long term, maximum	180 lbf 800 N
Tensile Load, short term, maximum	2700 N 607 lbf
Vertical Rise, maximum	428.0 m 1404.2 ft

Flame Test Specifications

Flame Test Listing	NEC OFC-LS (ETL) and c(ETL)
Flame Test Method	CSA FT4 IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 1202 IEEE 383 NES 713 UL 1685

Environmental Specifications

Environmental Space	Aerial, lashed Buried Low Smoke Zero Halogen (LSZH) Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	250 lb/in 44 N/mm
Compression Test Method	FOTP-41 IEC 60794-1-2, Section 7
Flex	35 cycles
Flex Test Method	FOTP-24 IEC 60794-1-2, Section 10
Impact	2.21 ft lb 3.00 N-m
Impact Test Method	FOTP-25 IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1-2, Section 24

Environmental Test Specifications

Cable Freeze	-2 °C 28 °F
Cable Freeze Test Method	FOTP-98
Drip	70 °C 158 °F
Drip Test Method	FOTP-81 IEC 60794-1-2, Section 17
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001 EN 187105 Telcordia GR -20-CORE Issue 3 Telcordia GR-409-CORE Issue 2
-------------------------------	------------------------------------------------------------------------------------------------------

760155077 | Z-072-LA-5LF12BK/25D

Regulatory Compliance/Certifications

Agency

RoHS 2002/95/EC
ISO 9001:2008

Classification

Compliant
Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5L-LT (Product Component—not orderable) — LazrSPEED® 300 OM3 Multimode Fiber