
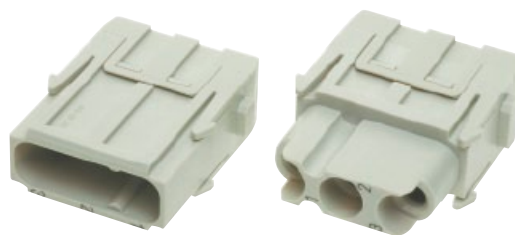






Number of contacts

3



Identification	Part number		Drawing	Dimensions in mm						
	Male insert (M)	Female insert (F)								
Crimp terminal Order crimp contacts separately				<table><tr><td></td><td>h_M</td></tr><tr><td>09 14 003 3001</td><td>39.1 mm</td></tr><tr><td>09 14 003 3002</td><td>43.1 mm</td></tr></table>		h_M	09 14 003 3001	39.1 mm	09 14 003 3002	43.1 mm
	h_M									
09 14 003 3001	39.1 mm									
09 14 003 3002	43.1 mm									
Cable diameter up to 5 mm	09 14 003 3001	09 14 003 3101		<table><tr><td></td><td>h_F</td></tr><tr><td>09 14 003 3101</td><td>40.7 mm</td></tr><tr><td>09 14 003 3102</td><td>44.7 mm</td></tr></table>		h_F	09 14 003 3101	40.7 mm	09 14 003 3102	44.7 mm
	h_F									
09 14 003 3101	40.7 mm									
09 14 003 3102	44.7 mm									
Cable diameter up to 7.5 mm	09 14 003 3002	09 14 003 3102								
			 Contact arrangement view from termination side							

Han
Modular

Identification	Wire gauge (mm²)	Part number		Drawing	Dimensions in mm																								
		Male contact	Female contact																										
Crimp contacts																													
Power contacts																													
silver plated	1.5	09 32 000 6104	09 32 000 6204																										
	2.5	09 32 000 6105	09 32 000 6205																										
	4	09 32 000 6107	09 32 000 6207																										
	6	09 32 000 6108	09 32 000 6208																										
	10*	09 32 000 6109	09 32 000 6209																										
				<table><tr><th colspan="2">Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>1.75</td><td>9 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>2.25</td><td>9 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>2.85</td><td>9.6 mm</td></tr><tr><td>6 mm²</td><td>AWG 10</td><td>3.5</td><td>9.6 mm</td></tr><tr><td>10 mm²</td><td>AWG 8</td><td>4.3</td><td>15 mm</td></tr></table>	Wire gauge		Ø	Stripping length	1.5 mm²	AWG 16	1.75	9 mm	2.5 mm²	AWG 14	2.25	9 mm	4 mm²	AWG 12	2.85	9.6 mm	6 mm²	AWG 10	3.5	9.6 mm	10 mm²	AWG 8	4.3	15 mm	
Wire gauge		Ø	Stripping length																										
1.5 mm²	AWG 16	1.75	9 mm																										
2.5 mm²	AWG 14	2.25	9 mm																										
4 mm²	AWG 12	2.85	9.6 mm																										
6 mm²	AWG 10	3.5	9.6 mm																										
10 mm²	AWG 8	4.3	15 mm																										
				Stripping length a = 15 mm for cables ≥ 5 mm Stripping length a = 18 mm for cables ≥ 6.4 mm																									

* for modules 09 14 003 3002 and 09 14 003 3102 only

Stock items in bold type