


700211154 | P-072-DS-5L-FMUAQ  
Plenum Distribution Cable, 72 fiber multi-unit with 12 fiber subunits

## Representative Image

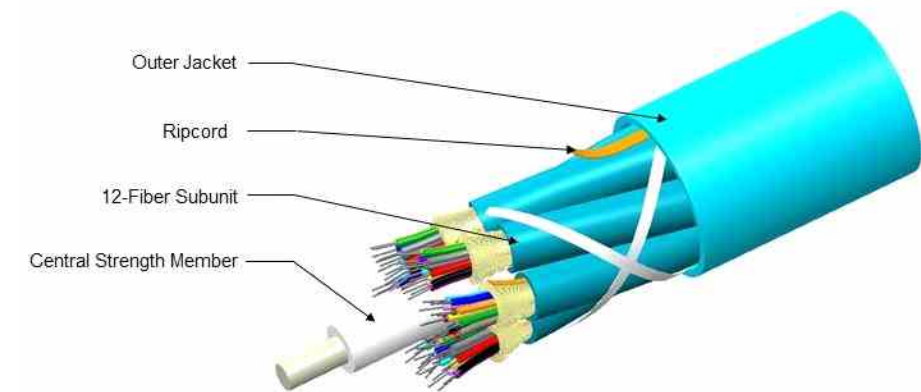

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Total Fiber Count	72
Fiber Type	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Fiber Type, quantity	72
Fibers per Subunit, quantity	12
Jacket Color	Aqua

## Dimensions

Buffer Tube/Subunit Diameter	5.77 mm   0.23 in
Cable Weight	237.0 lb/kft   353.0 kg/km
Diameter Over Jacket	18.96 mm   0.75 in
Subunit, quantity	6

## Physical Specifications

Minimum Bend Radius, loaded	28.4 cm   11.2 in
Minimum Bend Radius, unloaded	19.0 cm   7.5 in
Tensile Load, long term, maximum	90 lbf   400 N
Tensile Load, short term, maximum	300 lbf   1335 N

700211154 | P072-DS-5L-FMUAQ

Vertical Rise, maximum 386.0 m | 1266.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 262

## Environmental Specifications

Environmental Space	Plenum
Installation Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
-------------------------------	---------------------------------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

700211154 | P072-DS-5L-FMUAQ

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber

---

## \* **Footnotes**

Operating Temperature Specification applicable to non-terminated bulk fiber cable