


760031104 | P-002-ZC-5K-F16AQ  
1.6 mm Plenum Zipcord Cable

## Representative Image

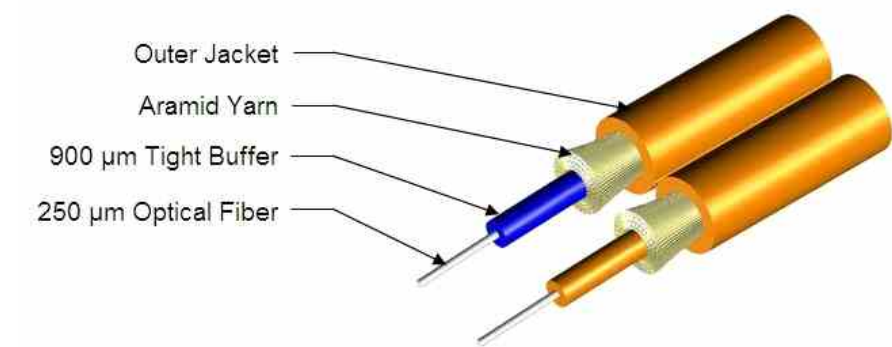

## General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	LazrSPEED® 550, 50 µm multimode fiber (OM4)
Total Fiber Count	2
Fiber Type	LazrSPEED® 550, 50 µm multimode fiber (OM4)
Fiber Type, quantity	2
Jacket Color	Aqua

## Dimensions

Cable Weight	4.0 lb/kft	6.0 kg/km
Height Over Jacket	1.70 mm	0.07 in
Width Over Jacket	3.50 mm	0.14 in

## Physical Specifications

Minimum Bend Radius, loaded	5.0 cm	2.0 in
Minimum Bend Radius, unloaded	3.0 cm	1.2 in
Tensile Load, long term, maximum	15 lbf	67 N
Tensile Load, short term, maximum	50 lbf	222 N
Vertical Rise, maximum	500.0 m	1640.4 ft

760031104 | P002-ZC-5K-F16AQ

## Flame Test Specifications

Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 262

## Environmental Specifications

Environmental Space	Plenum
Installation Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.55 ft lb   0.74 N-m
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
-------------------------------	---------------------------------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

CS-5K-TB (Product Component—not orderable) — LazrSPEED® 550 OM4 Bend-Insensitive Multimode Fiber

## \* Footnotes

---

Operating Temperature Specification applicable to non-terminated bulk fiber cable