



Ring Terminal T&B Catalog Number:

UPC Number:

K10-516R-M

Status:

78621010901

Description:

Active

Non-Insulated Ring Terminal for Wire Range 12-10 Stud Size 5/16, Metallic

Features

Brazed Seam ensures barrel does not separate during crimping. Chamfered barrel entry.

Standards

UL

General

| | |
|-----------------|---------------------|
| Insulation Type | Non-Insulated |
| Material | Copper |
| Finish | Electro -Tin Plated |
| Color | Metallic |
| Wire Range | 12-10 |
| Stud Size | 5/16 |

Dimension Information

| | |
|-------------|-------|
| d1 (inches) | .134 |
| D (inches) | .220 |
| E (inches) | .236 |
| F (inches) | .531 |
| L (inches) | 1.063 |
| T (inches) | .039 |
| W (inches) | .591 |

Specifications

| | |
|---------------------|-----------|
| Temperature Rating | 150°C |
| Voltage Rating | 600V |
| Flammability Rating | UL 94 V-0 |

Tooling

| | |
|-------------------|-------------------------|
| Application Tools | WT111M, WT112M, CM2000A |
|-------------------|-------------------------|

Packaging

| | |
|--------------------|-----------------|
| T&B Order Multiple | 1000 |
| T&B Inner Pack | 1000 |
| Package in Units | 10000 |
| T&B Sold in UOM | Each |
| T&B Weight Per UOM | 5 lbs. per 1000 |

Certifications



File Nbr:


E9809

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.

T&B Technical Support
MS 3B-50

Hours: 7AM - 6PM CDT
Monday-Friday

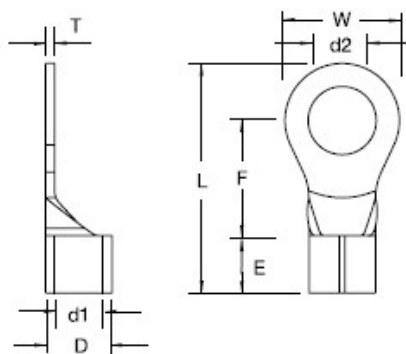

Memphis, TN 38125
www.tnb.com

8155 T&B Blvd.
Memphis, TN 38125

Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com