

# CCH Pigtailed Splice Cassette 36 F, LC APC duplex shuttered, Single-mode (OS2), Ribbon

CORNING

**Part Number:**  
**CCH-CS36-AF-P00RJ**

Closet Connector Housing (CCH) pigtailed splice cassettes enable faster field splicing and easy modular management of connectorization within the housing. They are preloaded and prerouted for quick fusion splicing of either individual or ribbon fiber pigtails, using the same space-saving platform as the standard CCH splice cassette. The prerouted pigtailed cassettes reduce field labor by streamlining features and components to allow for efficiencies in the field. They are prepped with a 2 m pigtail assembly with all pre-existing CCH panel connector options. The pigtailed cassettes have colored 250  $\mu\text{m}$  for ease of splicing. They also enable strain relief to be pre-applied to the assemblies from the manufacturing facility. With the pigtailed cassette, individual splice tray or separate splice housings are eliminated, allowing splicing to be done away from the rack housing in more convenient workspaces. The modular design makes it easy to access the fiber in an individual cassette without disturbing the other fibers in the housing. Each cassette is shipped with the pigtailed CCH adapter panel of the customer's choice, one rail for use with CCH-01U/2U/3U housings, and two rails used with CCH-04U housings. Grommets and cable ties for additional strain relief and protective braided tubing for incoming cable are also included. Splicing cassettes ship with the appropriate quantity and type of heat-shrink splice protectors.

## Features and Benefits

### **Manage cable slack for a CCH panel in a modular footprint**

Fast, easy and reliable initial routing, and quick, simple reaccess for moves, adds and changes (MACs)

### **Includes everything needed to convert a CCH housing for modular routing and/or splicing**

Easy ordering and field installation

### **Modular splice capability**

Manage all splices inside the housing

### **Colored 250 $\mu\text{m}$ at splice point**


Easy to identify and prep colored 250  $\mu\text{m}$  for fast and easy splicing

### **Pre-prepped splice cassette**

Saves time in the field with a ready to splice product

### **Broad operating temperature range (-40°C to +65°C)**

Utility and flexibility

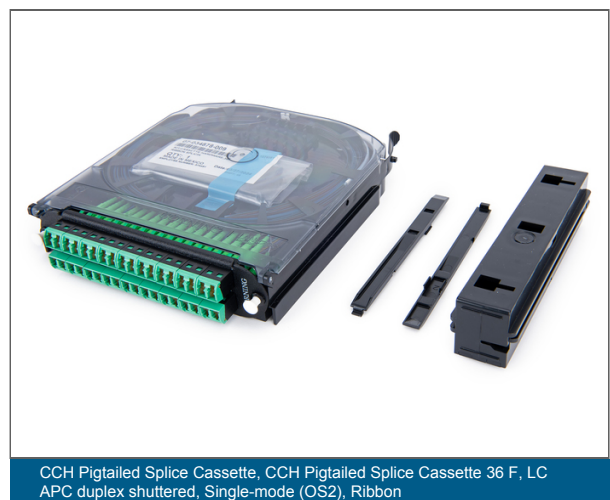

# CCH Pigtailed Splice Cassette 36 F, LC APC duplex shuttered, Single-mode (OS2), Ribbon



CCH Pigtailed Splice Cassette, CCH Pigtailed Splice Cassette 36 F, LC APC duplex shuttered, Single-mode (OS2), Ribbon



CCH Pigtailed Splice Cassette, CCH Pigtailed Splice Cassette 36 F, LC APC duplex shuttered, Single-mode (OS2), Ribbon

## Specifications

General Specifications	
Product Type	Rack-Mountable Hardware
Cable Type	Ribbon
Access Type	Front access
Mounting Type	CCH Housings
Application	Enterprise Networks, Data Center

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	Meets ANSI/TIA/EIA-568A and 606, Tested in accordance with Telecordia GR-3125, UL1863 - Communication Circuit Accessories

# CCH Pigtailed Splice Cassette 36 F, LC APC duplex shuttered, Single-mode (OS2), Ribbon



Environmental Conditions	
Temperature Range, Operation	-40 °C to 65 °C ( -40 °F to 149 °F )

Design	
Fiber Count	36
Connector Configuration	LC Duplex
Polish	APC
Housing Type	Cassettes
Panel or Module Type	CCH
Splice Protectors Type	Heat Shrink, Mass Fusion
Number of Splice Protectors	3
Number of Ports	36

Design - Adapter	
Shuttered adapter	Yes
Adapter Type	LC Duplex

Optical Specification - Hardware	
Insertion Loss	≤ 0.25 dB

Dimensions	
Height	35 mm (1.38 in)
Width	163 mm (6.42 in)
Depth	200 mm (7.87 in)

Ordering Information	
Product Number	CCH-CS36-AF-P00RJ

CCH Pigtailed Splice Cassette 36 F, LC APC  
duplex shuttered, Single-mode (OS2), Ribbon



Ordering Information	
Units per Delivery	1/1
Shipping Height	50 mm (1.97 in)
Shipping Width	200 mm (7.87 in)
Shipping Depth	362 mm (14.25 in)



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.